

## **Terpene Blend**



Benzene

Butane

Ethanol

Chloroform

Ethyl Acetate

## Certificate of Analysis

Name: Jack Herer

Matrix:Terpene Blend Lot #: ABX0004055

Product#: ABXTB0072

Manufacture Date: 04/21/2022

**Pass** 

Pass

Pass

Pass

Pass

Expiration Date: 04/21/2023

Overall Result: Pass

Test	Specification	Result	
Appearance	Colorless to yellow clear liquid	Pass	

Volumetric glassware complies with Class A tolerance requirements of ASTM E 288 and NIST Circular 434; it is calibrated before first use and recalibrated regularly in accordance with ASTM E 542 and NIST Procedure NBSIR 74-461. Balances are calibrated regularly with weights certified traceable to the NIST national mass standard. Thermometers and temperature probes are calibrated before first use and recalibrated regularly with a thermometer traceable to NIST standards. All products are prepared according to master documents that assure manufacture according to validated methods. Batch records docwnent raw material traceability and production and testing history for each lot manufactured.

Specific Gravity @ 25 °C		Density Range	Result  Pass  Water Activity ()\y) < 0.65  0_359	
0.865	A 2	0.85-0.89		
Gas Chromatograph	Residu	al Solvent Analysis		
>90% purity		Pass		
1,2-Dichloroethane	Pass	Ethyl Ether	Pass	
Acetone	Pass	Ethylene Oxide	Pass	
Acetonitrile	Pass	Heptane	Pass	

**Pass** 

Pass

Pass

Pass

**Pass** 


Hexane


Methanol

Pentane

Isopropyl Alcohol

Methylene Chloride

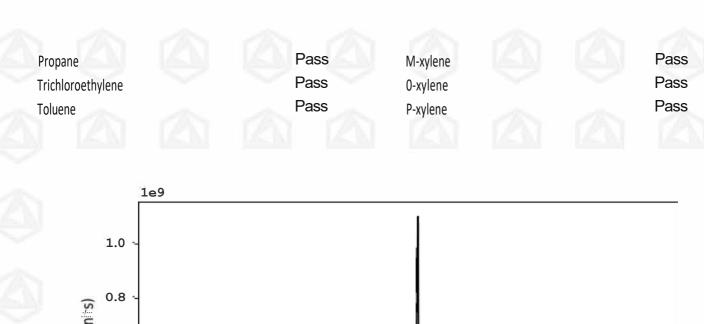

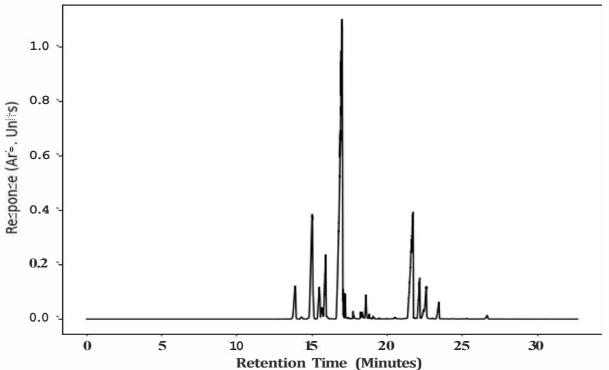

DATA REVIEWED AND APPROVED BY:

Tristhan Tran

Tristhan Tran QC Chemist 04/21/2022

This Certificate of Analysis is accurate to the best of our knowledge. However, the customer is responsible for performing its own assessment to ensure that the material is suitable for its intended applications, including compliance with all pertinent legal requirements. The expected shelf life is calculated from the original manufacture date and is based on unopened containers stored under proper conditions. Once containers have been opened, maintaining minimal headspace and storing under appropriate conditions will aid in preserving the product's integrity.